


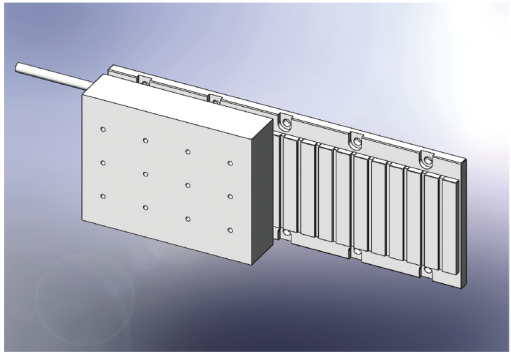


标准规格/Standard Specifications	
绝缘耐压/Insulation Capacity	: AC1500V 1min
周围温度/Operating Range	: 0~25℃
冷却方式/Cooling Method	: Self-cool
绝缘电阻/Insulation Resistance	: DC500V 100MΩ or more
周围湿度/Operating range	: 20~80%(No condensation)
(in controlled environment)	
最大温度/Maximum temperature	: 125℃

详细规格/Specification			
参数 Parameter	单位 Unit	LMFH020-CP196	LMFH020-CP364
性能指标 Performance Specifications			
额定推力 Continuous Force	N	742.1	1475.5
峰值推力 Peak Force	N	1654	3288.4
电气性能 Electrical Specifications			
线间感应电压常数 BEMF Constant(line-line,peak)	V/(m/s)	126.20	125.50
额定电流 Continuous Current	Arms	4.80	9.60
峰值电流 Peak Current,Stall	Arms	10.70	21.40
推力常数 Force Constant	N/Arms	154.6	153.7
马达常数 Motor Constant	N/√W	56.50	81.10
线间电阻 (25℃) Resistance,25℃ (line-line)	Ω	5.1	2.5
线间电感 Inductance,(line-line)	mH	116.00	58.00
放热常数 Thermal Resistance	℃/W	0.37	0.18
磁吸力 Attraction Force	Kn	2.695	5.405
最大电压 Maximum Bus Voltage	V _{DC}	600	600
机械性能 Mechanical Specifications			
定子重量 Coil Weight	kg	7	13.5
定子长度 Coil Length	mm	196	364
磁轨重量 Magnet Track Weight	kg/m	8.6	8.6
磁极间距 (NN) Magnetic Pole Pitch (NN)	mm	42	42

- 注/Notes:
- 1.Performance is dependent upon heat sink configuration, system cooling conditions,and ambient temperature.
 - 1.性能取决于散热器配置、系统冷却条件和环境温度。
 - 2.Values shown @ 100℃ rise above a 25℃ ambient temperature,with motor mounted to the specified aluminum heat sink.
 - 2.在高于25℃至100℃的环境温度时，电机需安装在指定的铝制散热器上。
 - 3.Peak force assumes correct rms current;consult SMJ.
 - 3.峰值扭矩下设置正确的电流值，请咨询SMJ。
 - 4.Force constant and motor constant specified at stall.
 - 4.失速时规定的力常数和电机常数
 - 5.All performance and electrical specifications±10%.
 - 5.所有性能和电气规格偏差 ± 10%

外形尺寸/Dimensions(mm)

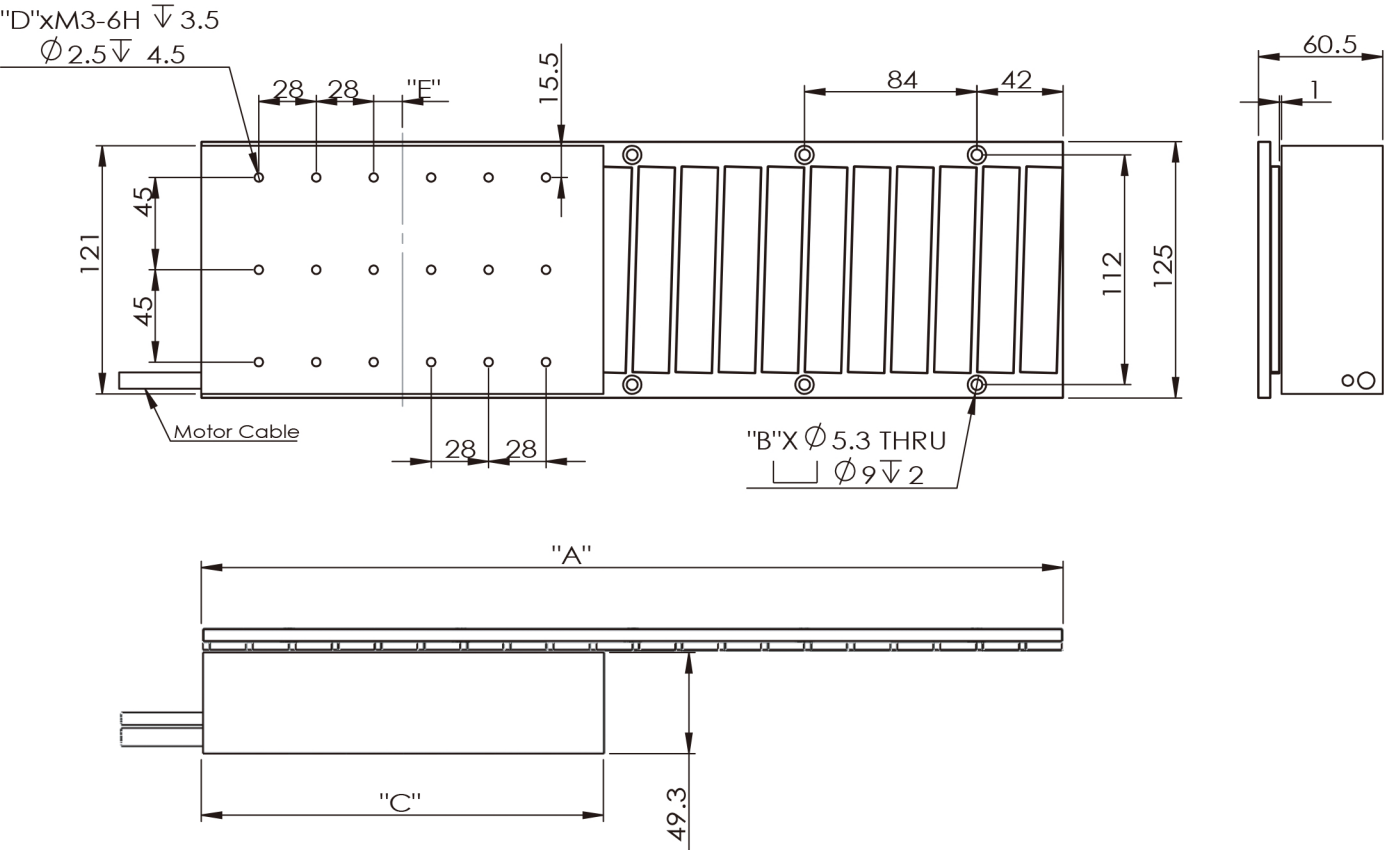

定子/ Magnet Plate

Model No.	A	B
LMFH020-MP168	168	4
LMFH020-MP252	252	6
LMFH020-MP420	420	10

动子/Coil Plate

Model No.	C	D	E
LMFH020-CP196	196	18	14
LMFH020-CP364	364	36	14